

## 4-Port Compact USB Hub TU-400E (v2)

TRENDnet's TU-400E is a highly integrated 4-port USB hub. It consists of one upstream and four downstream ports and was designed to bridge USB interfaced peripherals to your desktop or notebook computer. The TU-400E complies with USB 1.0/1.1 specifications and supports both full (12Mbps) and low (1.5Mbps) data rate speeds. With Plug-and-Play and Hot-Swap, you can easily connect/disconnect USB equipped camera, network adapter, modem, and joystick to your computer. Connect each port to another USB hub for limited expansion. Compact, light-weighted, and requiring no external power, the TU-400E is ideal for SOHO and mobile computing.

### FEATURES

- Compliant with USB 1.1 Specifications
- Supports all USB speeds: Low-Speed (1.5Mbps), Full-Speed (12Mbps)
- Switches to the peripheral's Highest Supported Speed Automatically
- Supports up to 127 USB Devices
- Supports Suspend and Resume Operations
- Compatible with Windows 98SE/ME/2000/XP, Linux and Mac Operating Systems
- One USB A-B cable included (60cm /2ft.)
- Supports Plug & Play and Easy Installation
- 2-Year Warranty

### BENEFITS

**Compatibility:**

4-port USB Hub is compatible with Windows 98/ME/2000/XP, Linux, and Macintosh, so it is ready to work as soon as the user plugs it into PC

**Flexibility:**

TU-400E provides convenient ways to connect USB devices to Desktop or Laptop

**Expandability:**

Daisy-chain to additional USB Hubs to allow the use of up to 127 USB devices at the same time

**Speed:**

Supports 12Mbps high-speed and 1.5Mbps low-speed operations mode


# 4-Port Compact USB Hub

## TU-400E (v2)

### SPECIFICATIONS

Hardware	
Standard	<ul style="list-style-type: none"><li>• USB 1.1</li></ul>
Ports	<ul style="list-style-type: none"><li>• 1 x Upstream Port (Type B)</li><li>• 4 x Downstream Ports (Type A)</li></ul>
OS Compliant	<ul style="list-style-type: none"><li>• Windows 98SE/ME/2000/XP, Linux &amp; Mac OS</li></ul>
Data Rate	<ul style="list-style-type: none"><li>• Full-Speed: 12Mbps</li><li>• Low-Speed: 1.5Mbps</li></ul>
Power Consumption	<ul style="list-style-type: none"><li>• 500mA (max) per port</li></ul>
LED	<ul style="list-style-type: none"><li>• Power</li></ul>
Max Devices Supported	<ul style="list-style-type: none"><li>• 127 (daisy-chaining with other USB hubs)</li></ul>
Dimensions	<ul style="list-style-type: none"><li>• 80 x 35 x 10 mm (3.14 x 1.4 x 0.4 inches)</li></ul>
Weight	<ul style="list-style-type: none"><li>• 10g (0.35oz.)</li></ul>
Temperature	<ul style="list-style-type: none"><li>• Operating: 0°~ 45°C (32°~ 113°F)</li><li>• Storage: -20°~ 70°C (-4°~ 158°F)</li></ul>
Operating Humidity	<ul style="list-style-type: none"><li>• 0% to 90% (Non-Condensing)</li></ul>
Certifications	<ul style="list-style-type: none"><li>• FCC, CE</li></ul>

### NETWORKING SOLUTIONS

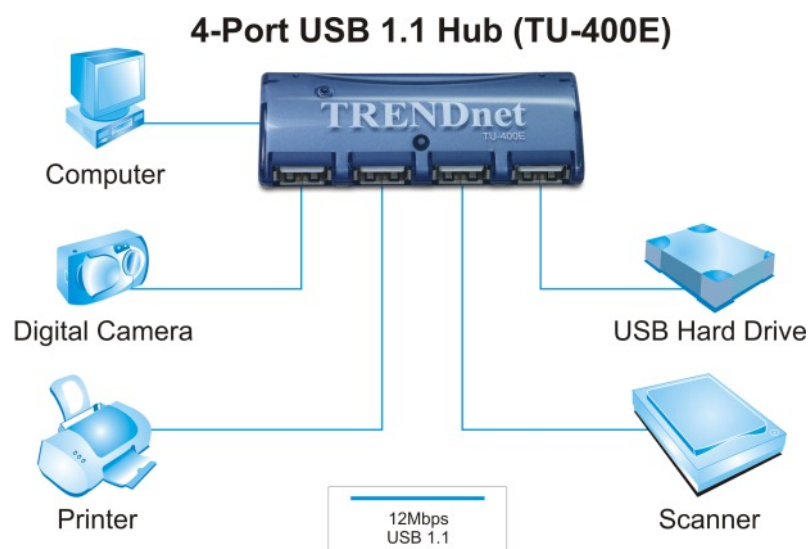

### PACKAGE CONTENTS

- TU-400E
- Quick Installation Guide
- USB A-B Cable

### RELATED PRODUCTS

<b>TEW-P1U</b>	Wireless Print Server with 1 USB Printer Port
<b>TU-ET100C</b>	10/100Mbps USB to Ethernet Adapter

### ORDERING INFORMATION

**TRENDnet®**

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: [www.trendnet.com](http://www.trendnet.com)

Email: [sales@trendnet.com](mailto:sales@trendnet.com)

To Order Please Call:

**1-888-326-6061**

