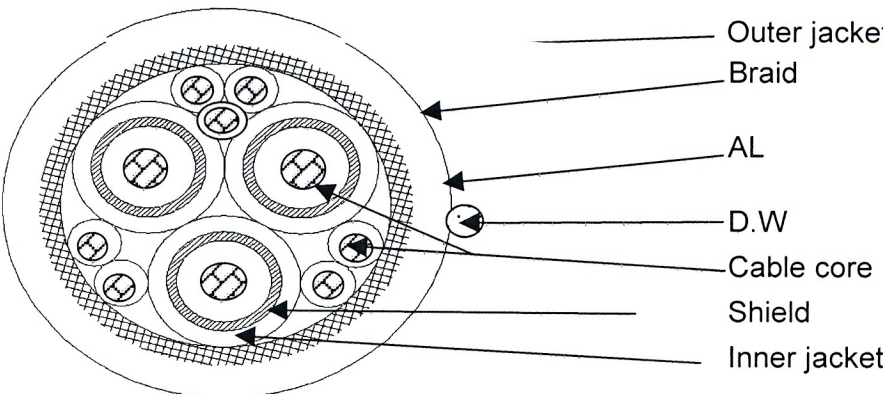


## DATA SHEET

SPECIFICATION	[(7/0.12BC+FPE+7/0.12BC+PVC)*3+(7/0.12BC+PVC)*7+AL+7/0.12BC+B(64/0.12ALM)+BLACK PVC8.5			
The first Structure	(7/0.12BC+FPE+7/0.12BC+PVC)*3			
1.Inner conductor	Construction	7/0.12MM Bare copper wire; Pitch 22MM		
2.Insulation	OD	1.4±0.05MM		
	Material	FPE		
	Colour	Primary colours		
3.Shield	Construction	7/0.12MM Bare copper wire; Pitch 22MM		
	Pitch	22MM		
4.Inner jacket	OD and colours	2.2±0.05MM Red\Blue\Green		
	Thickness and material	0.4mm YT-***-85PVC		
THE Second Structure	(7/0.12BC+PVC)*7			
1.Cable core	Construction	7/0.12MM Bare copper wire; Pitch 22MM		
2.Insulation	OD	0.8±0.02MM		
	Material	PVC		
	Colours	White□Yellow□Green□Blue□Red□Black□Orange		
Cabling				
1.OD	5.1MM			
2.Pitch	120±10MM Right revolve			
3.Aluminium foil structure	24*0.025MM Single-side conductive□Conductive outward			
D.W				
Construction	7/0.12 MM Bare copper wire			
Braid				
1.Pitch	50.2MM			
2.Construction	16*4*0.12MM Aluminium magnesium alloy silk			
3.Overlap	65%			
Outer jacket				
1.OD	8.5±0.2MM			
2.Thickness	1.0±0.1MM			
3.Material	Ordinary□YT-001-85PVC			
4.Colour	Black			
Printed words				
Product image□			Note□	
			Figur NO.□	
			Products□	
			Version/time□	A/0
			Date□	10.9.2012
			Check□	Pan zhengwen
Revision status□			Prepare□	