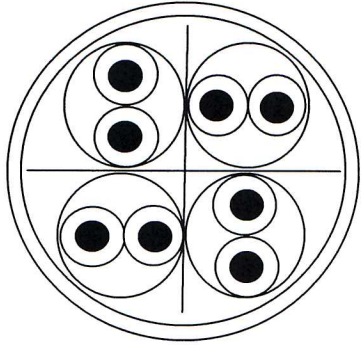


Product specification

Product	CAT6 UTP PATCH 24AWG×4P	NO.		Page	1/2
Edition	2	Established Date	2008-7-22	Revised Date	2008-7-22
Approval		Checked		Finish	morganmiu

Configuration & Physical Characters:

1. Conductor	Material	Bare Copper	
	Size	24AWG	
	Construction	7/0.20 ± 0.015	
2. Insulation	Material	HD-PE	
	Thickness	MIN at any point: 0.18mm MAX AVG:0.20mm	
	Diameter	0.98 ± 0.03	
	Colors	Blue/White-Blue Orange/White-Orange Green/White-Green Brown/White-Brown	
	Elongation	MIN 300%	
	Tensile strength	MIN 1.682Kg/mm²	
Jacket	Material	PVC	
	Thickness	MIN at any point: 0.56mm MAX AVG: 0.58mm	
	Diameter	6.0 ± 0.3	
	Colors	Assorted upon request	
	Elongation	MIN 100%	
	Tensile strength	MIN 1.407Kg/mm²	
5. Marking		PremiumCord CM 24AWG 4P (UL) C(UL) UTP CABLE ISO/IEC 11801 AND TIA/EIA 568 CAT6 xxxxxM	