

HDMI & VGA HDBaseT Transmitter with EU Wall Plate

VE2812EUT

- ATEN VE2812EUT is a transmitter for sending VGA (with audio) and HDMI signals up to 100 m over a single Cat 5e/6/6a or ATEN 2L-2910 Cat 6 cable. With EU Wall Plate design, the VE2812EUT can be conveniently mounted in a two - gang junction box. The VE2812EUT guarantees reliable transmission of HDMI / VGA signals. For HDMI signal transmission, it supports 3D, Deep Color, and embedded HD lossless audio formats. To pursue longer distance transmission, it supports Long Reach Mode up to 150 m via a single Cat 5e/6 cable at resolutions up to 1080p.

For utility flexibility, the VE2812EUT can serve as a video switch by connecting two sources and distribute them to an identical output. The compact wall plate design does away with bulky cables, allowing a neat and convenient installation. Therefore, The VE2812EUT is specifically designed for use in meeting rooms, digital educational environment or wherever needed to meet application requirements.



Top View





Side View



Side View

Features

- Extends HDMI or VGA signals over a single Cat 5e/6/6a or ATEN 2L-2910 Cat 6 cable
- Designed to mount in a two-gang junction box
- HDMI 1.4 (3D, Deep color, 4K); HDCP 2.2 compliant
- Superior video quality:
 - HDMI: 4K at distance up to 100 m via a Cat 6a or ATEN 2L-2910 Cat 6 cable
 - VGA: 1600 x 1200 and 1920 x 1200 up to 100 m via a Cat 6a or ATEN 2L-2910 Cat 6 cable
- Supports HDBaseT Long Reach Mode – up to 150 m via a single Cat 5e/6 cable at resolutions up to 1080p
- Supports Auto Switch – automatically switches to a newly plugged-in source
- Functions as a switch or a converter
 - A Switch: Connects two sources (HDMI or VGA)
 - A Converter: Applies receivers with different interface (DVI, DisplayPort, or HDMI)
- Supports RS-232 channel transmission or command mode for source switch control
- Compatible Receivers – VE1812R, VE812R, VE814AR, VE811R, VE801R, VE802R, VE601R, VE901R or future ATEN HDBaseT Receivers
- Plug-and-play
- Rack mountable
- Built- in 8KV / 15 KV ESD protection
- LED indication of sources and device status

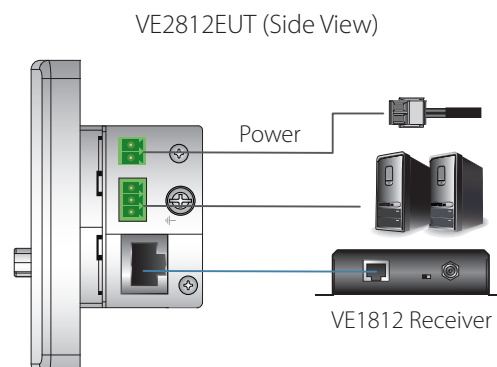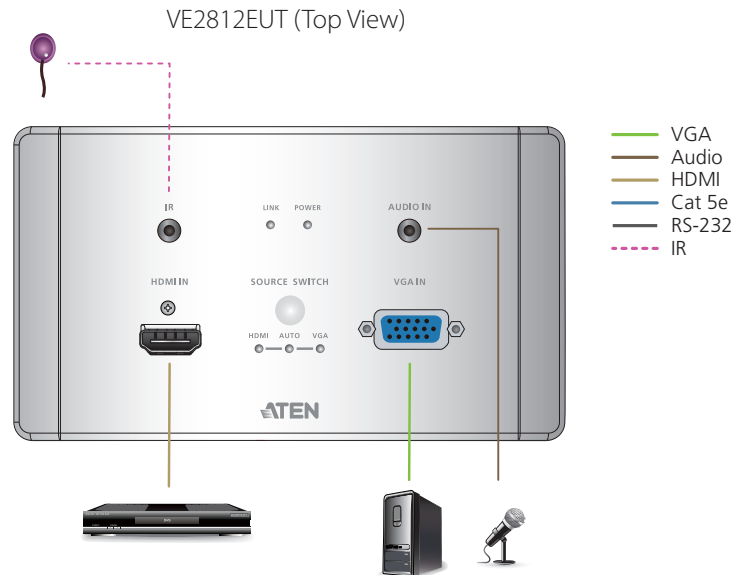

Specifications

Function	VE2812EUT
Video Input	
Interfaces	1 x HDMI Type A Female (Black) 1 x HDB-15 (VGA) Female (Blue)
Impedance	HDMI: 100 Ω HDB-15 (VGA): 75 Ω
Max. Distance	1.8 m
Video	
Max. Data Rate	10.2Gbps (3.4Gbps per lane)
Max. Pixel Clock	340 MHz
Compliance	HDMI (3D, Deep Color, 4K) HDCP Compatible Consumer Electronics Control (CEC)
Max. Resolutions / Distance	HDMI: Up to 4K @ 70 m (Cat 5e/6) / 100 m (Cat 6a/ATEN 2L-2910 Cat6); 1080p @ 100 m (Cat 5e/6/6a) VGA: Up to 1920 x 1200 & 1600 x 1200 @ 70 m (Cat 5e/6) / 100 m (Cat 6a/ATEN 2L-2910 Cat6); 1920 x 1080 @ 100 m (Cat 5e/6/6a) *4K supported: 4096 x 2160 / 3840 x 2160 @ 60Hz (4:2:0); 4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4)
Audio	
Input	1 x HDMI Type A Female (Black) 1 x Mini Stereo Jack Female (Green)
Connectors	
Unit To Unit	1 x RJ-45 Female
Power	1 x Terminal Block, 2 pole (Green)
Control	
RS-232	Connector: 1 x Terminal Block, 3 pole (Green) Baud Rate: 19200, Data Bits:8, Stop Bits: 1, no parity and flow control
IR	1 x Mini Stereo Jack Female (Black)
Power Consumption	DC5V, 3.14W
Environmental	
Operating Temperature	0 - 40°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.35 kg
Dimensions (L x W x H)	5.00 x 10.80 x 5.17 cm
Faceplate Dimension (L x W x H)	8.60 x 15.10 x 1.35 cm

Product information is subject to change without prior notice.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Publish Date: 07/2018 V1.0



© Copyright 2018 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.