

# **USER MANUAL**

**HDMI V2.0 SWITCH 7x1  
(Plastic Casing)**

---

# Enjoy the vivid world!

## INTRODUCTION

### **7x1 HDMI Switch:**


The 7x1 HDMI switch allows 7 HDMI ports to be switched to a single display terminal via remote control or buttons on unit. This HDMI Switch support video formats including 720p, 1080i, 1080p, 4K/30HZ, 4K/60HZ.

## FEATURES

- Support 6Gbps data rate for tmds clock up to 600MHz
- Support HDMI 2.0b
- Support 3D
- Supports highest video resolution 4K/60Hz
- Support 24/30/36 bit deep color
- Support input up to 8 metres AWG26 HDMI standard cable length, output up to 8metres AWG26 cable length(4K/30Hz and lower resolution)
- Support input up to 3 metres 2.0 HDMI standard cable length, output up to 5metres 2.0 HDMI cable length(4K/60Hz resolution)
- Supports single high definition display for multiple sources, such as DVD Players and HD players, PS4, Set Top Boxes
- Need DC5V/1A power supply

### Product Picture:



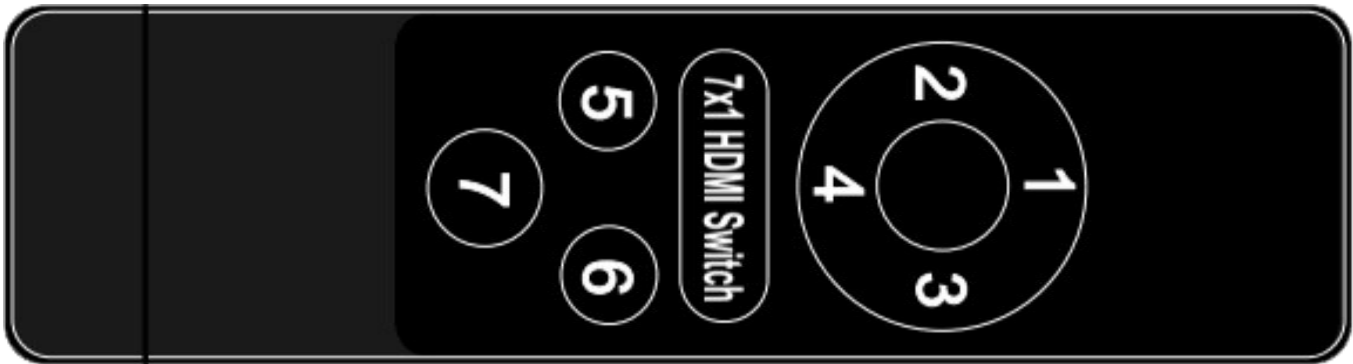

## SPECIFICATIONS:

HDMI version ..... HDMI 2.0b

HDMI resolution .....up to 4K/60Hz

Support video color format ..... 3D video format

Support video color format ..... 24/30/36 bit deep color

Support audio format.....DTS-HD/Dolby-trueHD/DTS/Dolby-AC3/DSD

Max bandwidth.....600MHz

Max baud rate.....6Gbps

Input cable distance.....≤8m AWG26 HDMI standard cable for 4K/30HZ; ≤3m 2.0 HDMI standard cable for 4K/60HZ

Output cable distance..... ≤8m AWG26 HDMI standard cable for 4K/30HZ; ≤5m 2.0 HDMI standard cable for 4K/60HZ

Max working current.....650mA

Power adapter format..Input: .....AC (50HZ, 60HZ) 100V-240V; Output: DC5V/1A

Operating Temperature range..... (-10 to +55°C)

Dimension (L x W x H) .....230x78x22 (mm)

Weight.....220g

## **Operating and Connecting**

- 1: Connect 7 HDMI cables from HDMI source device into HDMI switch input.
- 2: Connect 1 HDMI cable from HDMI source device into HDMI switch output.
- 3: Connect 5V/1A power adapter to the HDMI switch .

## **The Package includes**

1. HDMI Switch
2. IR Remote Control
3. 5V DC Power Supply
4. User Manual